

# OFFICE OF THE MARION COUNTY SURVEYOR

## SECTION RECORD CORNER

SECTION 1 TOWNSHIP 16 RANGE 4

DATE: 5-28-04

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 4-6-98

IN. S.P.C. E ZONE NAD '83

NAME: 16040104

N: 512301.6800(m)

E: 67507.6260(m)

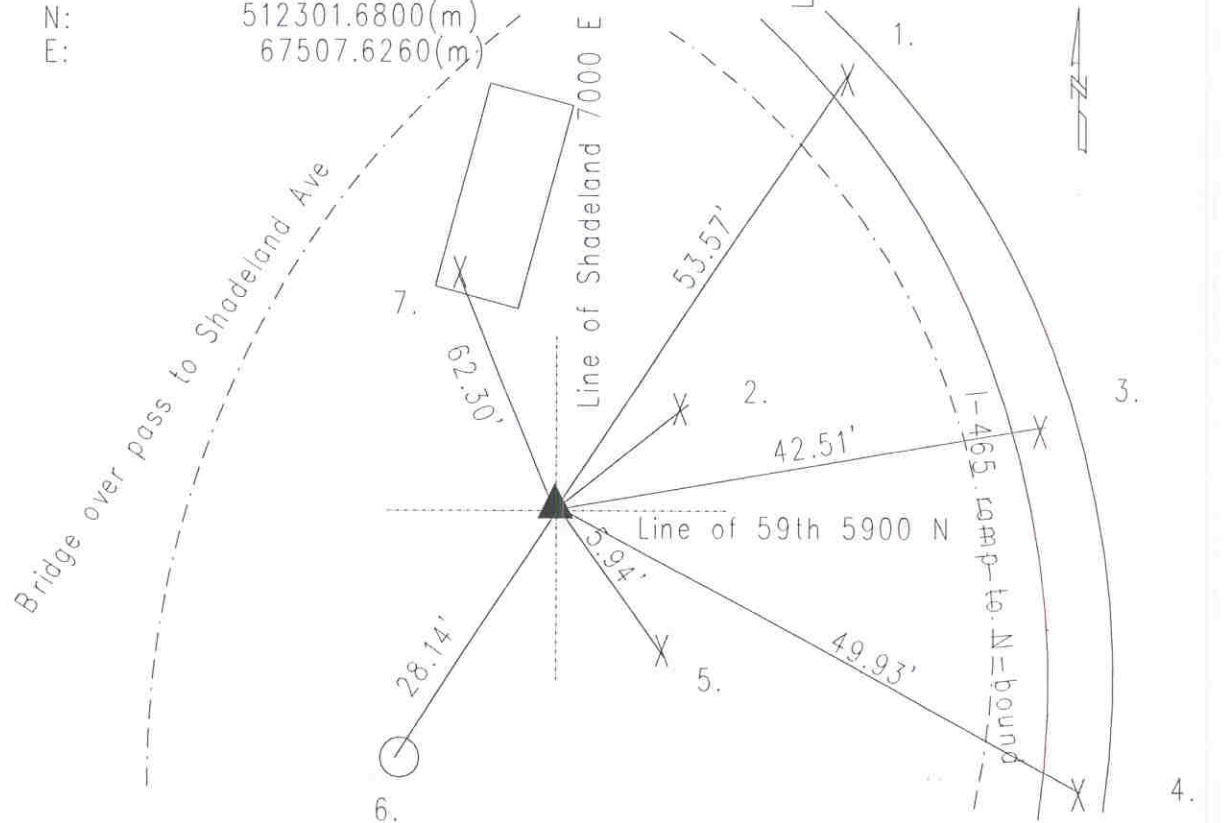

Original post set 1820 by Hendricks with witnesses: 24" lynn W 19 links; 8" beech S 82 E 29 links per Marion County Atlas pg. 11. Coyner 12-5-1895 called a stone per Lawrence Township Legal Survey Book pg. 42. 6-19-48 called concrete monument with brass plug. 6-13-60 called brass plug. This corner was excavated 5-11-89 Harrison set. Re-tied 4-6-98 by Wilcoxon. Re-tied 5-28-04 by Wilcoxon. 16040104

REF.	DISTANCE	DESCRIPTION
1.	53.57'	Cut 'x' in concrete wall
2.	5.81'	Cut 'x' in concrete
3.	42.51'	Cut 'x' in concrete wall
4.	49.93'	Cut 'x' in concrete wall
5.	5.94'	Cut 'x' in concrete road
6.	28.14'	Cut 'x' in top of beehive inlet
7.	62.30'	Cut 'x' in concrete pad by wall